


USBHID BoardLEDs

multiple IOs and stepper motor manager

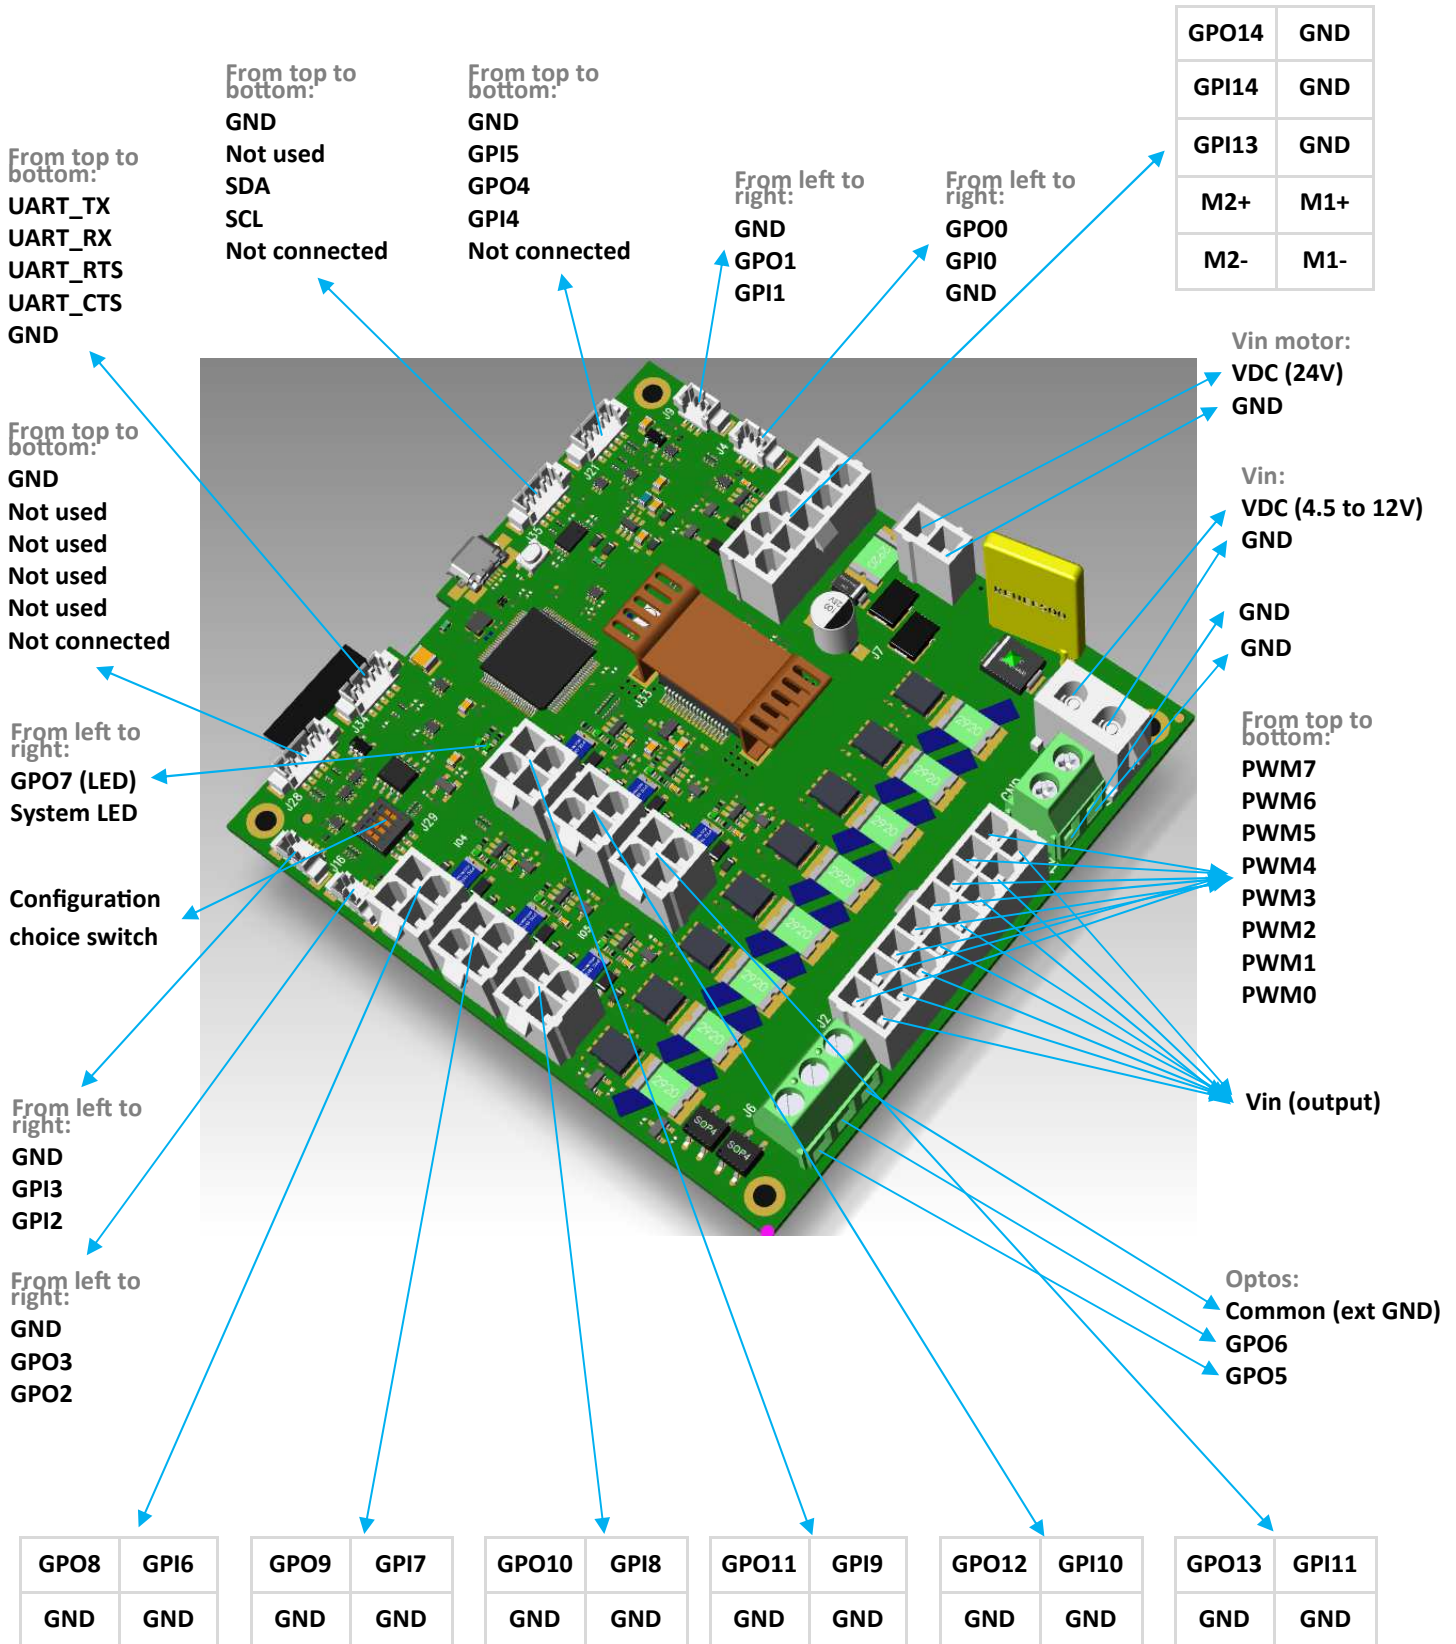

Specifications

Dimensions	94 x 98 mm
Weight	max 50g
Operating temperature	0 to +70°C
Power consumption	max 120W
GPO	15
GPI	15
PWM	8
Optocoupler	2
Stepper motor	1

Power supply

USB	4.5 to 5.5V (max 1A)
Vin	4.5 to 12V (max 120W)
Vin motor	12 to 24V (max 120W)

Features

Script engine	Board is driven by an intuitive scripting system editable with any text editor, allowing powerful synchronization between all your signals
Headless use (optional)	An EEPROM and a switch can be used to save and select the scripts to execute, allowing the board to work without the need of a computer
Wi-Fi (optional)	web user interface with either Chrome, Firefox or Safari